


TC PAD

Stocked for your convenience, the TC Pad features abrasive resin segments bonded to a flexible backer, mounted on a non-woven nylon pad. With no color transfer to the floor, the pad is designed to work at maximum speed under heavy grinders for high density overlayment and conventional concrete.

Features

- Expected lifespan 10,000 ft²
- 9" 10", and 11" sizing options
- Available in 50, 80, 100, 200, 400, 800, 1500, and 3000 grits
- Designed for dry grinding

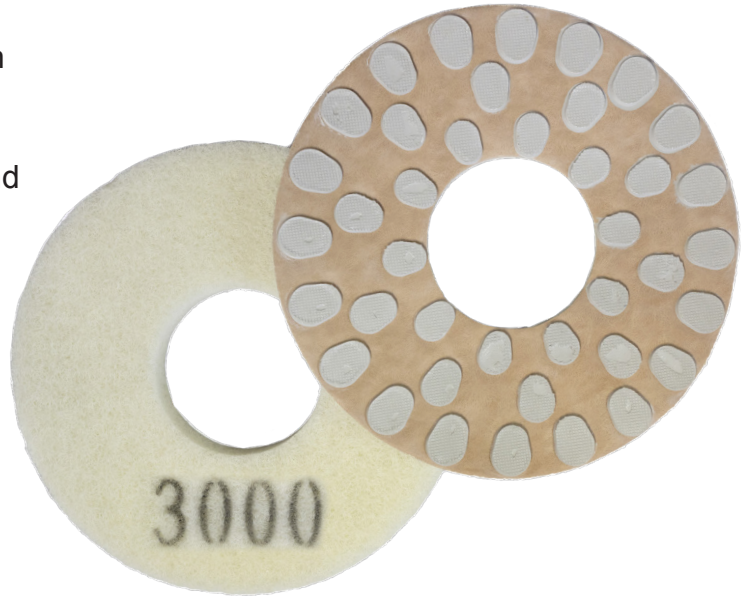

Item #	Description	Size	Grit	Bond	Concrete Hardness
685121	TC Pad	9"	50	Standard	Soft to Hard
685122	TC Pad	9"	80	Standard	Soft to Hard
685123	TC Pad	9"	100	Standard	Soft to Hard
685124	TC Pad	9"	200	Standard	Soft to Hard
685125	TC Pad	9"	400	Standard	Soft to Hard
685126	TC Pad	9"	800	Standard	Soft to Hard
685127	TC Pad	9"	1500	Standard	Soft to Hard
685128	TC Pad	9"	3000	Standard	Soft to Hard
685131	TC Pad	10"	50	Standard	Soft to Hard
685132	TC Pad	10"	80	Standard	Soft to Hard
685133	TC Pad	10"	100	Standard	Soft to Hard
685134	TC Pad	10"	200	Standard	Soft to Hard
685135	TC Pad	10"	400	Standard	Soft to Hard
685136	TC Pad	10"	800	Standard	Soft to Hard
685137	TC Pad	10"	1500	Standard	Soft to Hard
685138	TC Pad	10"	3000	Standard	Soft to Hard
685141	TC Pad	11"	50	Standard	Soft to Hard
685142	TC Pad	11"	80	Standard	Soft to Hard
685143	TC Pad	11"	100	Standard	Soft to Hard
685144	TC Pad	11"	200	Standard	Soft to Hard
685145	TC Pad	11"	400	Standard	Soft to Hard
685146	TC Pad	11"	800	Standard	Soft to Hard
685147	TC Pad	11"	1500	Standard	Soft to Hard
685148	TC Pad	11"	3000	Standard	Soft to Hard