



BSD Dry Flex Pad

Blue Star Diamond Technology

The BSD Dry Flex Pad has been developed for polishing concrete with the convenience of one pad per head, versus 3 resin pucks. It is also a great option for daily maintenance to remove light scratches and restore the original gloss of polished floors. Recommended for use with a velcro adaptor plate.




American Concrete Institute



PRODUCT FEATURES

- Superior performance on soft to very hard concrete
- Available in 200, 400, 800, 1500 and 3000 grit
- Velcro Attachment; Velcro adaptors available for purchase
- Available in 9" and 10" diameter
- Dry grinding only
- Packaged in quantities of 3 or 4 per grit

| BSD Item # | Size | Description | Grit | Product Hardness | Concrete Hardness |
|------------|------|---------------|------|------------------|-------------------|
| 699000 | 9" | Dry Flex Pads | 200 | Standard | Soft to Hard |
| 699001 | 9" | Dry Flex Pads | 400 | Standard | Soft to Hard |
| 699002 | 9" | Dry Flex Pads | 800 | Standard | Soft to Hard |
| 699003 | 9" | Dry Flex Pads | 1500 | Standard | Soft to Hard |
| 699004 | 9" | Dry Flex Pads | 3000 | Standard | Soft to Hard |
| 699100 | 10" | Dry Flex Pads | 200 | Standard | Soft to Hard |
| 699101 | 10" | Dry Flex Pads | 400 | Standard | Soft to Hard |
| 699102 | 10" | Dry Flex Pads | 800 | Standard | Soft to Hard |
| 699103 | 10" | Dry Flex Pads | 1500 | Standard | Soft to Hard |
| 699104 | 10" | Dry Flex Pads | 3000 | Standard | Soft to Hard |

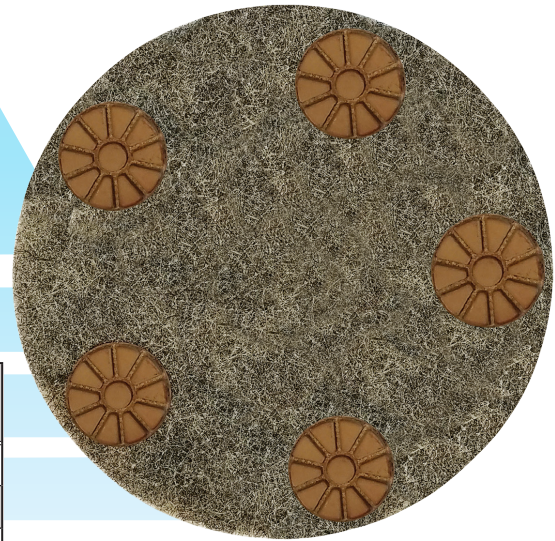

BSDdiamond.com
BSDsales@BorideAbrasives.com

PHONE 231.929.2121
 TOLL FREE 800.662.0336
 FAX 231.943.2852




Made in the USA

BORIDE
 Engineered Abrasives

2615 Aero Park Drive | Traverse City, MI 49686

GRIND • HONE • POLISH • FINISH



| | | | 30 | 50 | 80 | 100 | 200 | 270 | 400 | 800 | 1500 | 3000 | Concrete Hardness |
|---------------|----------------------|--------------|-------|-------|---------|-----|-----|-----|-----|-----|------|------|-------------------------------------|
| | EASY EDGE | 4" | ◆ | ◆ | | ◆ | | ◆ | ◆ | | | | Soft Medium Hard Very Hard |
| | | 5" | ◆ | ◆ | | ◆ | | ◆ | ◆ | | | | |
| | | 6" | ◆ | ◆ | | ◆ | | ◆ | ◆ | | | | |
| | | 7" | ◆ | ◆ | | ◆ | | ◆ | ◆ | | | | |
| | EDGE FLEX | 5" | ◆ | ◆ | | ◆ | | ◆ | ◆ | ◆ | ◆ | | |
| | | 7" | ◆ | ◆ | | ◆ | | ◆ | ◆ | ◆ | ◆ | | |
| | BSD CORNER TOOL | Triangle | ◆ | ◆ | | ◆ | ◆ | | ◆ | | | | |
| STANDARD Bond | PREMIUM TRANSITIONAL | 3" NO Boss | ◆ | ◆ | | ◆ | ◆ | | ◆ | | | | Soft Medium Hard |
| | | 3" WITH Boss | ◆ | ◆ | | ◆ | ◆ | | ◆ | | | | |
| | | 2" NO Boss | ◆ | ◆ | | ◆ | ◆ | | ◆ | ◆ | ◆ | | |
| | | 2" WITH Boss | ◆ | ◆ | | ◆ | ◆ | | ◆ | ◆ | ◆ | | |
| | 4 SEG FIRST CUT | 3" NO Boss | 30/40 | 60/80 | 120/140 | | | | | | | | Hard |
| | | 3" WITH Boss | 30/40 | 60/80 | 120/140 | | | | | | | | |
| | BSD | 3" NO Boss | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | ◆ | ◆ | | Soft Medium |
| | | 3" WITH Boss | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | | | | |
| | Dry Resin | 3" | | | | | | | ◆ | ◆ | ◆ | | Soft Medium Hard Very Hard |
| | | 2" | | | | | | | ◆ | ◆ | ◆ | | |
| | BSD PAD | 11" | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | ◆ | ◆ | ◆ | Soft Medium Hard Very Hard |
| | | 14" | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | ◆ | ◆ | ◆ | |
| SOFT Bond | PREMIUM 8 SEGMENT | 3" NO Boss | ◆ | ◆ | | ◆ | ◆ | | | | | | Very Hard |
| | | 3" WITH Boss | ◆ | ◆ | | ◆ | ◆ | | | | | | |
| | 4 SEG FIRST CUT | 3" NO Boss | 30/40 | 60/80 | 120/140 | | | | | | | | |
| | | 3" WITH Boss | 30/40 | 60/80 | 120/140 | | | | | | | | |
| | BSD | 3" NO Boss | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | | | | Hard |
| | | 3" WITH Boss | ◆ | ◆ | ◆ | ◆ | ◆ | | ◆ | | | | |

S

Soft
Concrete
2-3 MOHS
< 3000 PSI

M

Medium
Concrete
3-5 MOHS
3000-4000 PSI

H

Hard
Concrete
5-7 MOHS
4500-6000 PSI

VH

Very Hard
Concrete
7-9 MOHS
>6000 PSI